





OKBRAND
HIGH-TENSILE

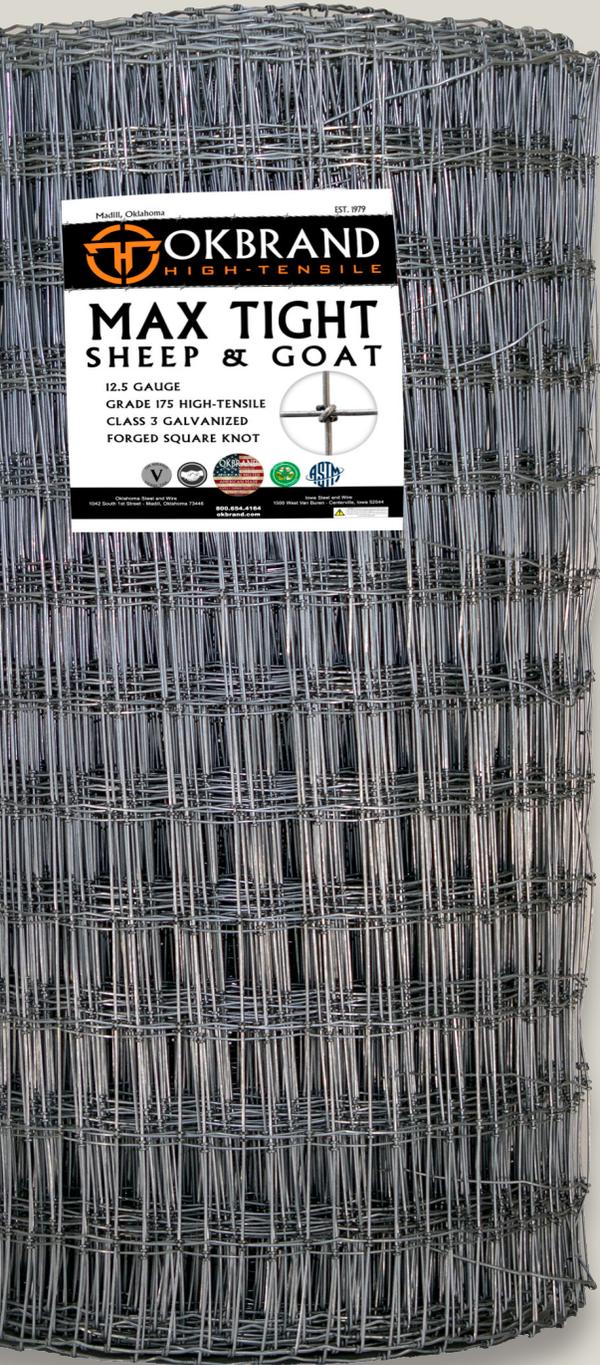

MAX TIGHT
FORGED SQUARE KNOT

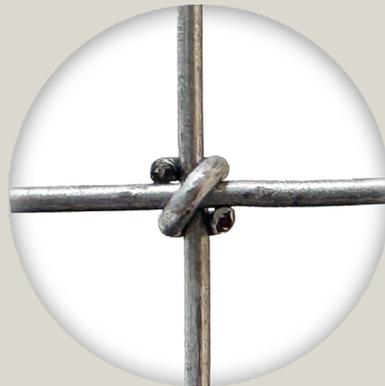

HIGH TENSILE
SHEEP & GOAT
HORSE FENCE

Oklahoma Steel & Wire
1042 South 1st Street
Madill, Oklahoma 73446
800.654.4164



okbrand.com

Iowa Steel & Wire
1500 West Van Buren
Centerville, Iowa 52544
800.325.5118



MAX TIGHT FORGED SQUARE KNOT HORSE FENCE

OKBRAND Max Tight High-Tensile Horse Fence, is a high-tensile forged square knot fencing system engineered to provide unparalleled protection for your valuable companions. Continuous vertical and horizontal wires, a forged square knot with a third wire, these features along with the High-Tensile 12.5 gauge wire provide strength and rigidity and the safety needed for your prized animals. The 4"x2" spacings ensure the safety of your horses. This spacing prevents hoof entanglement while maintaining a secure boundary, offering peace of mind for horse owners and caretakers.



MAX TIGHT FORGED SQUARE KNOT SHEEP & GOAT FENCE

OKBRAND manufactures Max Tight High-Tensile Forged Square Knot Sheep & Goat Fence with 4" x 4" spacing from top to bottom to confine your most stubborn animals. The Forged Square Knot combined with high-tensile galvanized wire provides enduring strength under the harshest farm and ranch conditions.



As with all OKBRAND Max Tight products our Horse Fence and Sheep & Goat products have the added benefit of our unique "Versi-Tail" feature. This feature allows for quicker installation by adding an 8" tail at the beginning of each roll and an 8" tail at each end. This feature eliminates the need to remove cross-wire staples to allow enough wire for tying corners or splicing rolls.

What do the numbers in the product description mean?

1660-4-12.5

<u>16</u>	<u>60"</u>	<u>4"</u>	<u>12.5</u>
Number Of Horizontal Wires	Fence Height	Stay opening	Filler wire gauge

MAX TIGHT FORGE SQUARE KNOT FENCE										
PRODUCT	NO HORIZ WIRES	FENCE HEIGHT	STAY OPENING	INSIDE WIRE GAUGE	TOP/BOTTOM GAUGE	ROLL LENTGH	APPROX WEIGHT	ROLLS/PALLET	COATING	TENSILE
1348-2-12.5	13	48"	2"	12.5	12.5	200'	238	4	Class 3	
1660-2-12.5	16	60"	2"	12.5	12.5	200'	293	4	Class 3	
1348-2-12.5	13	48"	2"	12.5	12.5	300'	357	3	Class 3	
1660-2-12.5	16	60"	2"	12.5	12.5	300'	440	3	Class 3	
1348-4-12.5	13	48"	4"	12.5	12.5	330'	250	4	Class 3	
1660-4-12.5	16	60"	4"	12.5	12.5	330'	308	4	Class 3	

For inquiries about special orders, feel free to contact our sales team for assistance and availability.